


FUSE/03


OWNER'S MANUAL




- 01.** Fasten screws **only** on the “NO GAP” side so that the scope can be rotated in the rings.

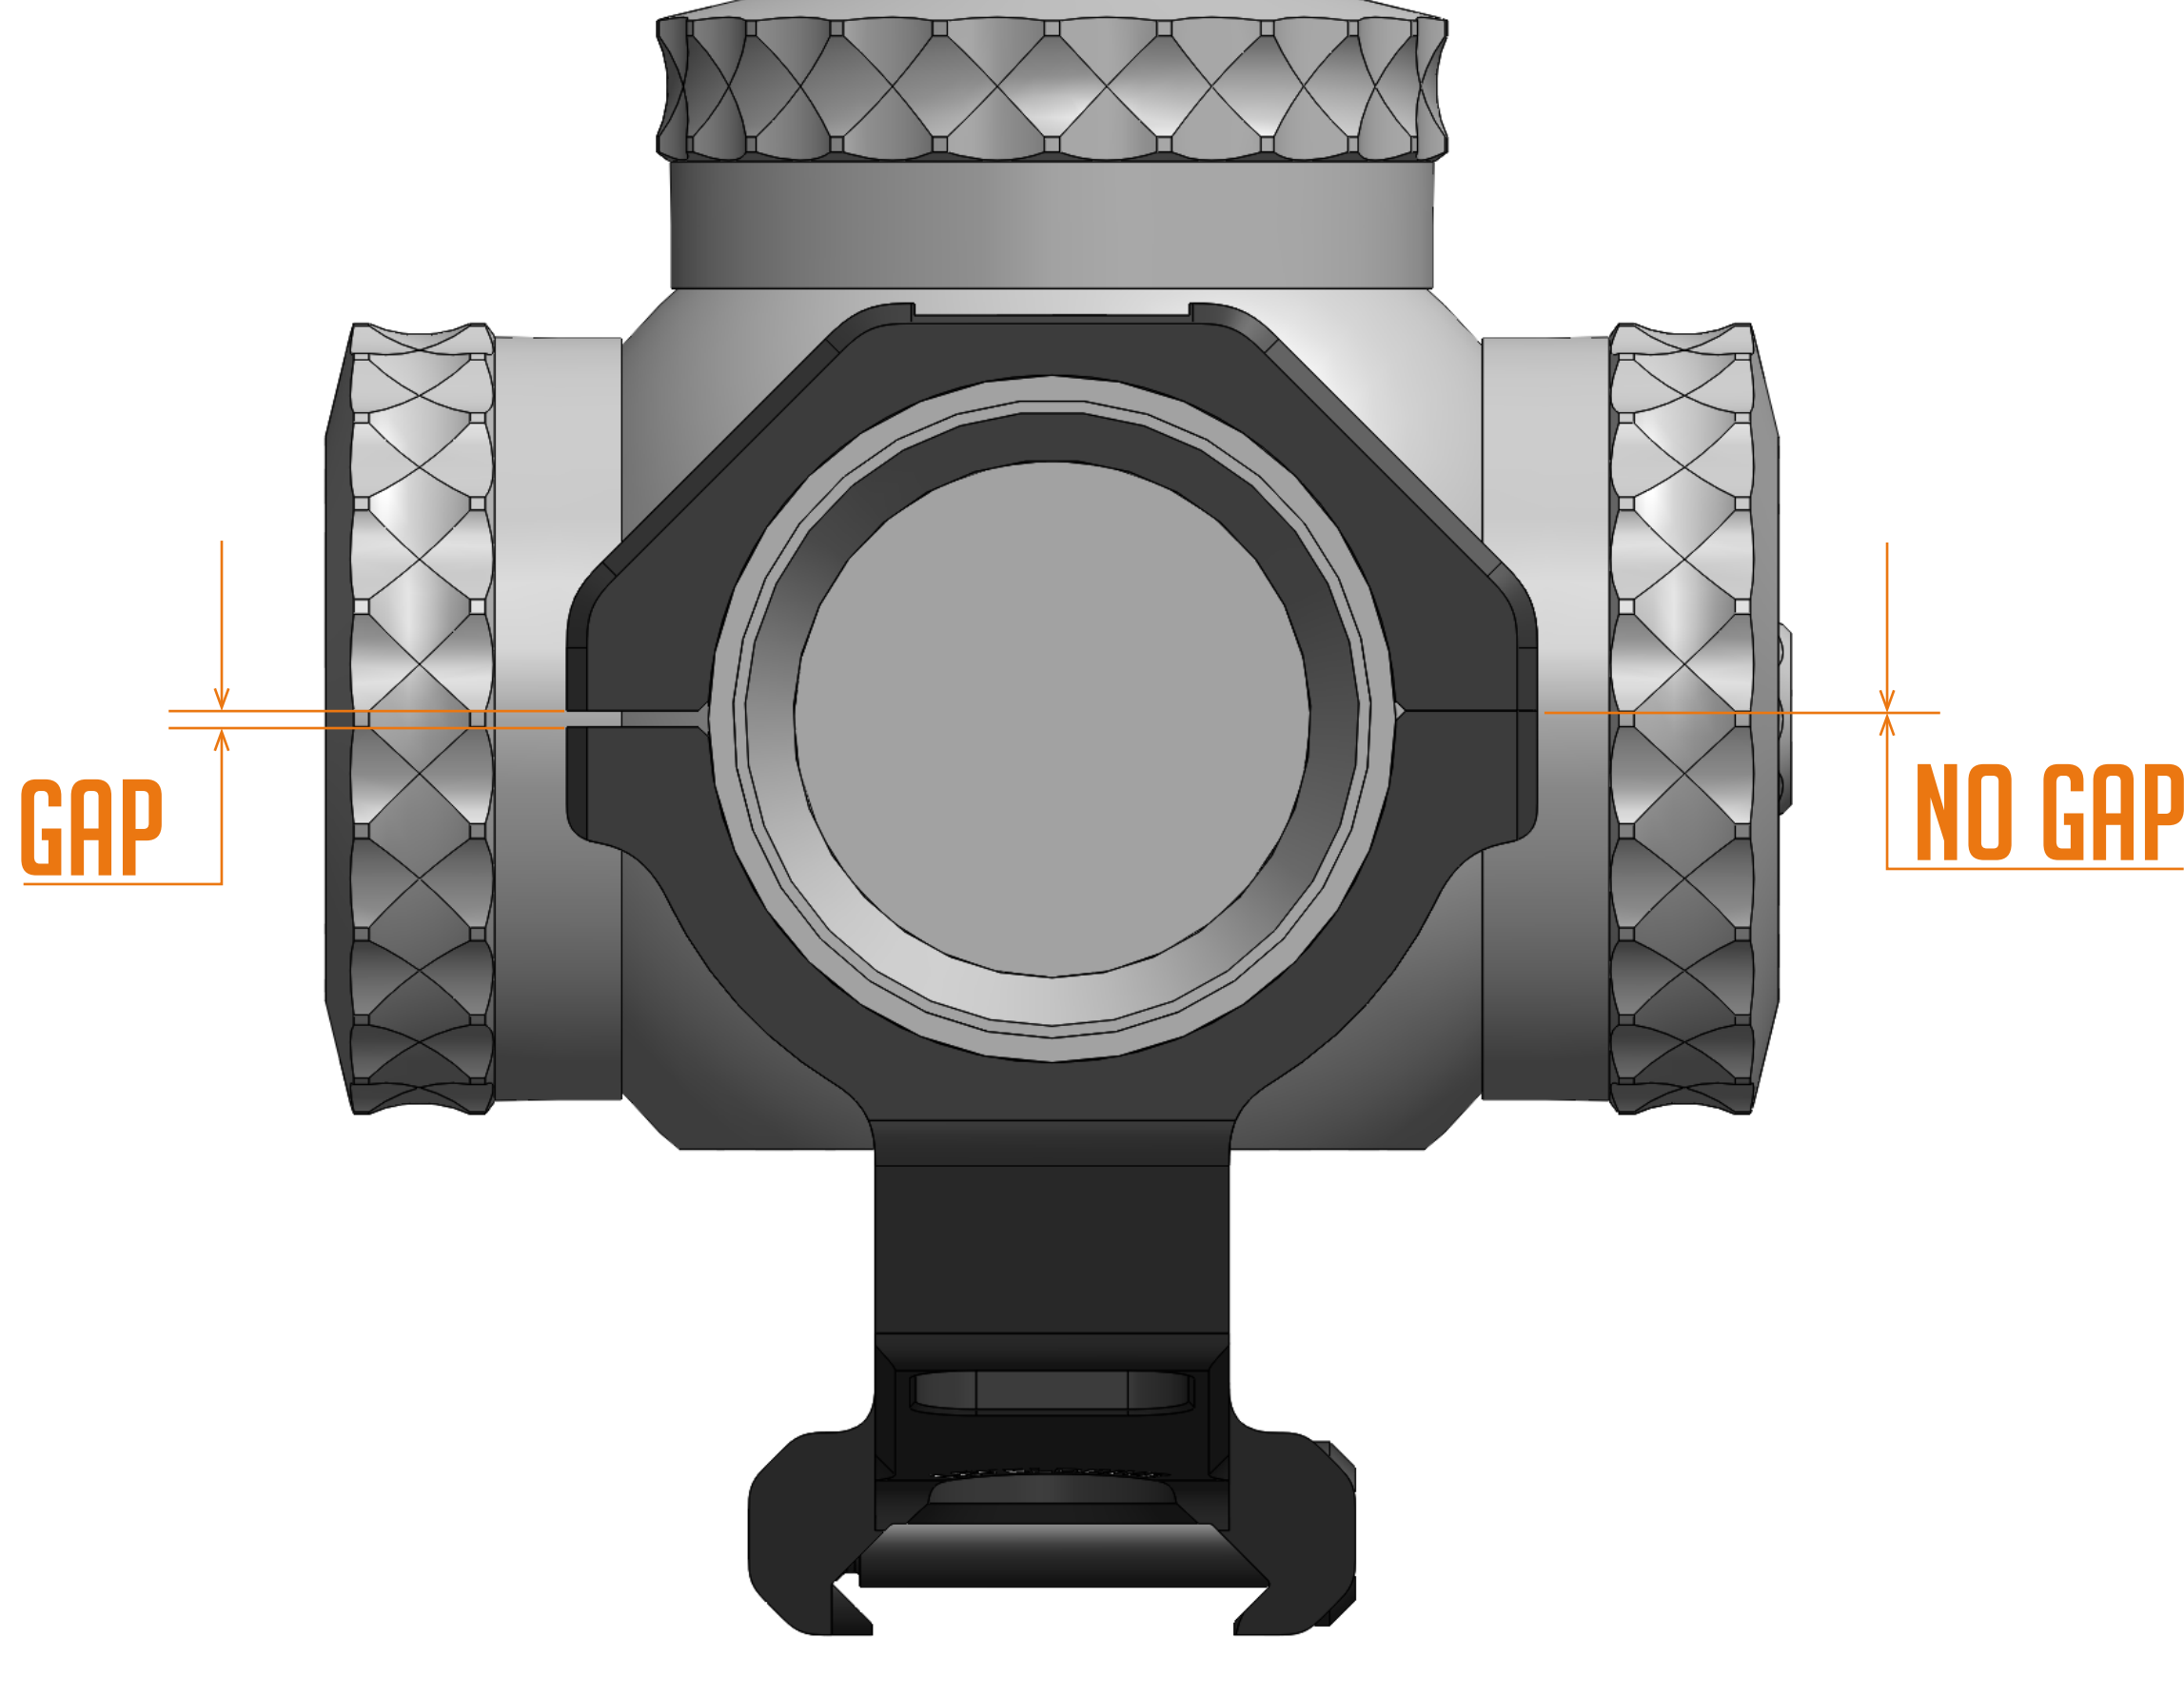


- 02.** Tighten each screw in the pattern shown, as many times as needed until torque stabilizes at 20inch-lbs.

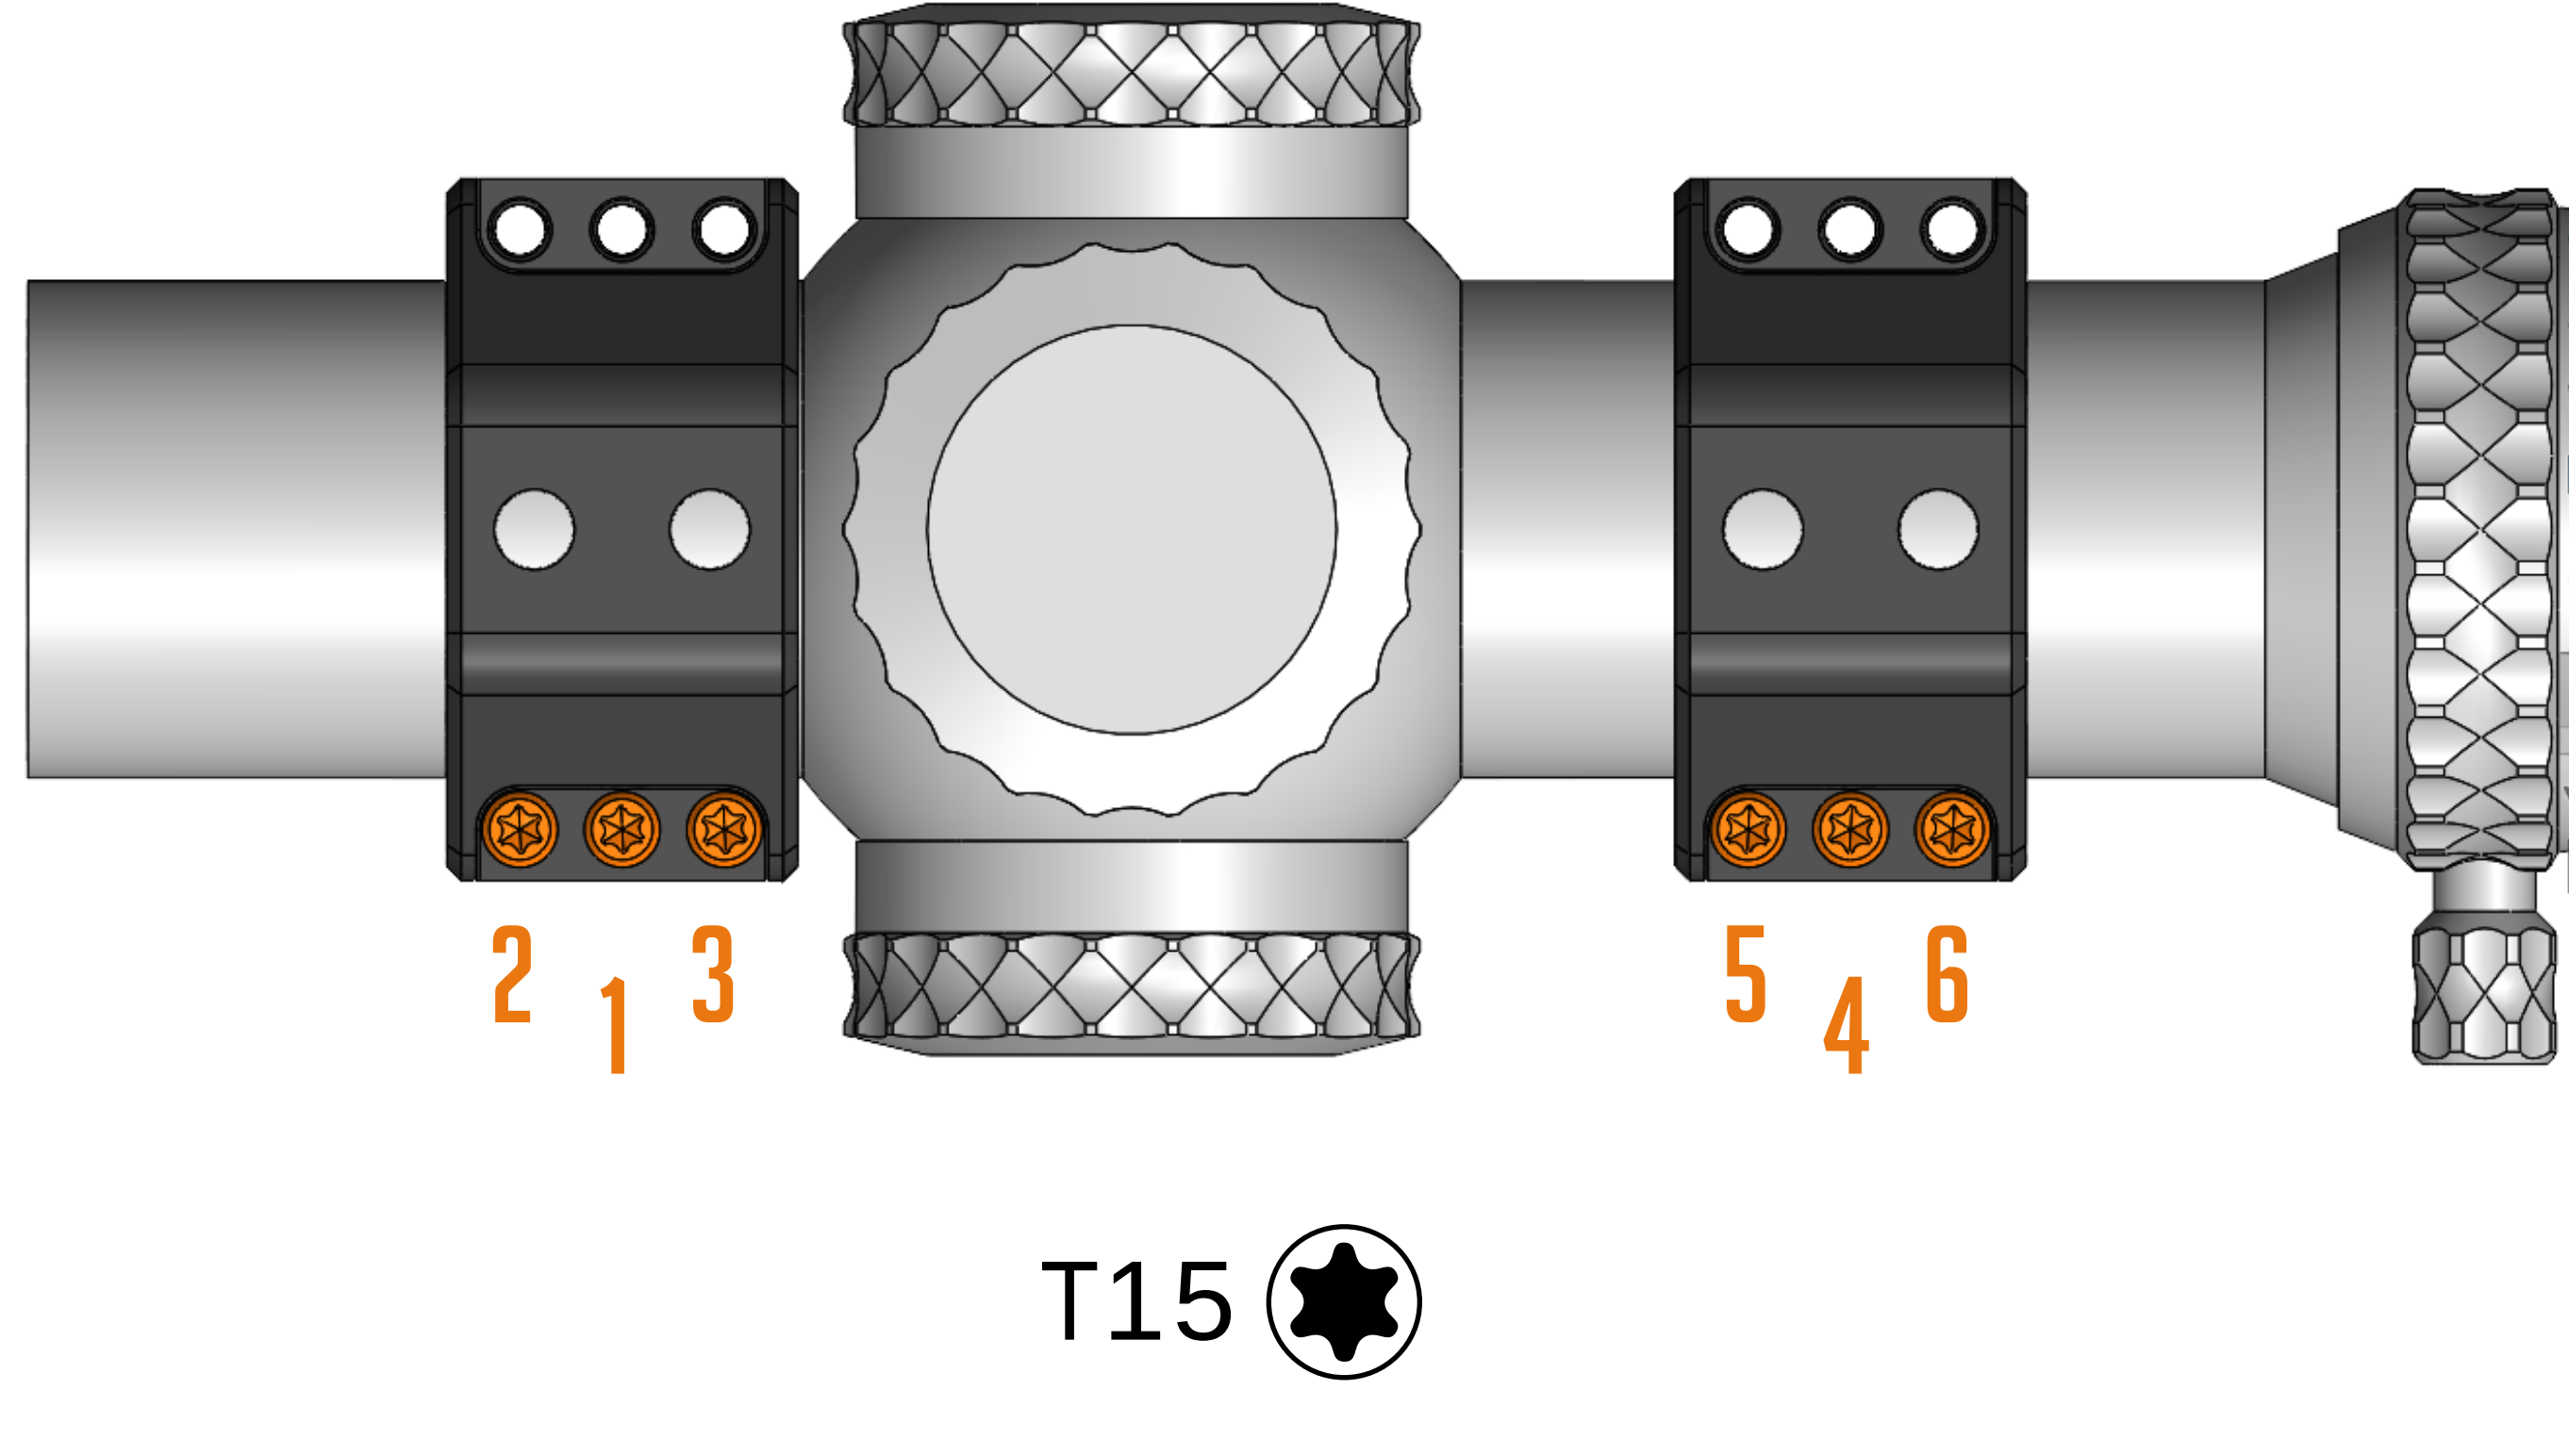


- 03.** Rotate scope while turning in LevelDrive. Repeat until no gap is visible between LevelDrive & Scope.

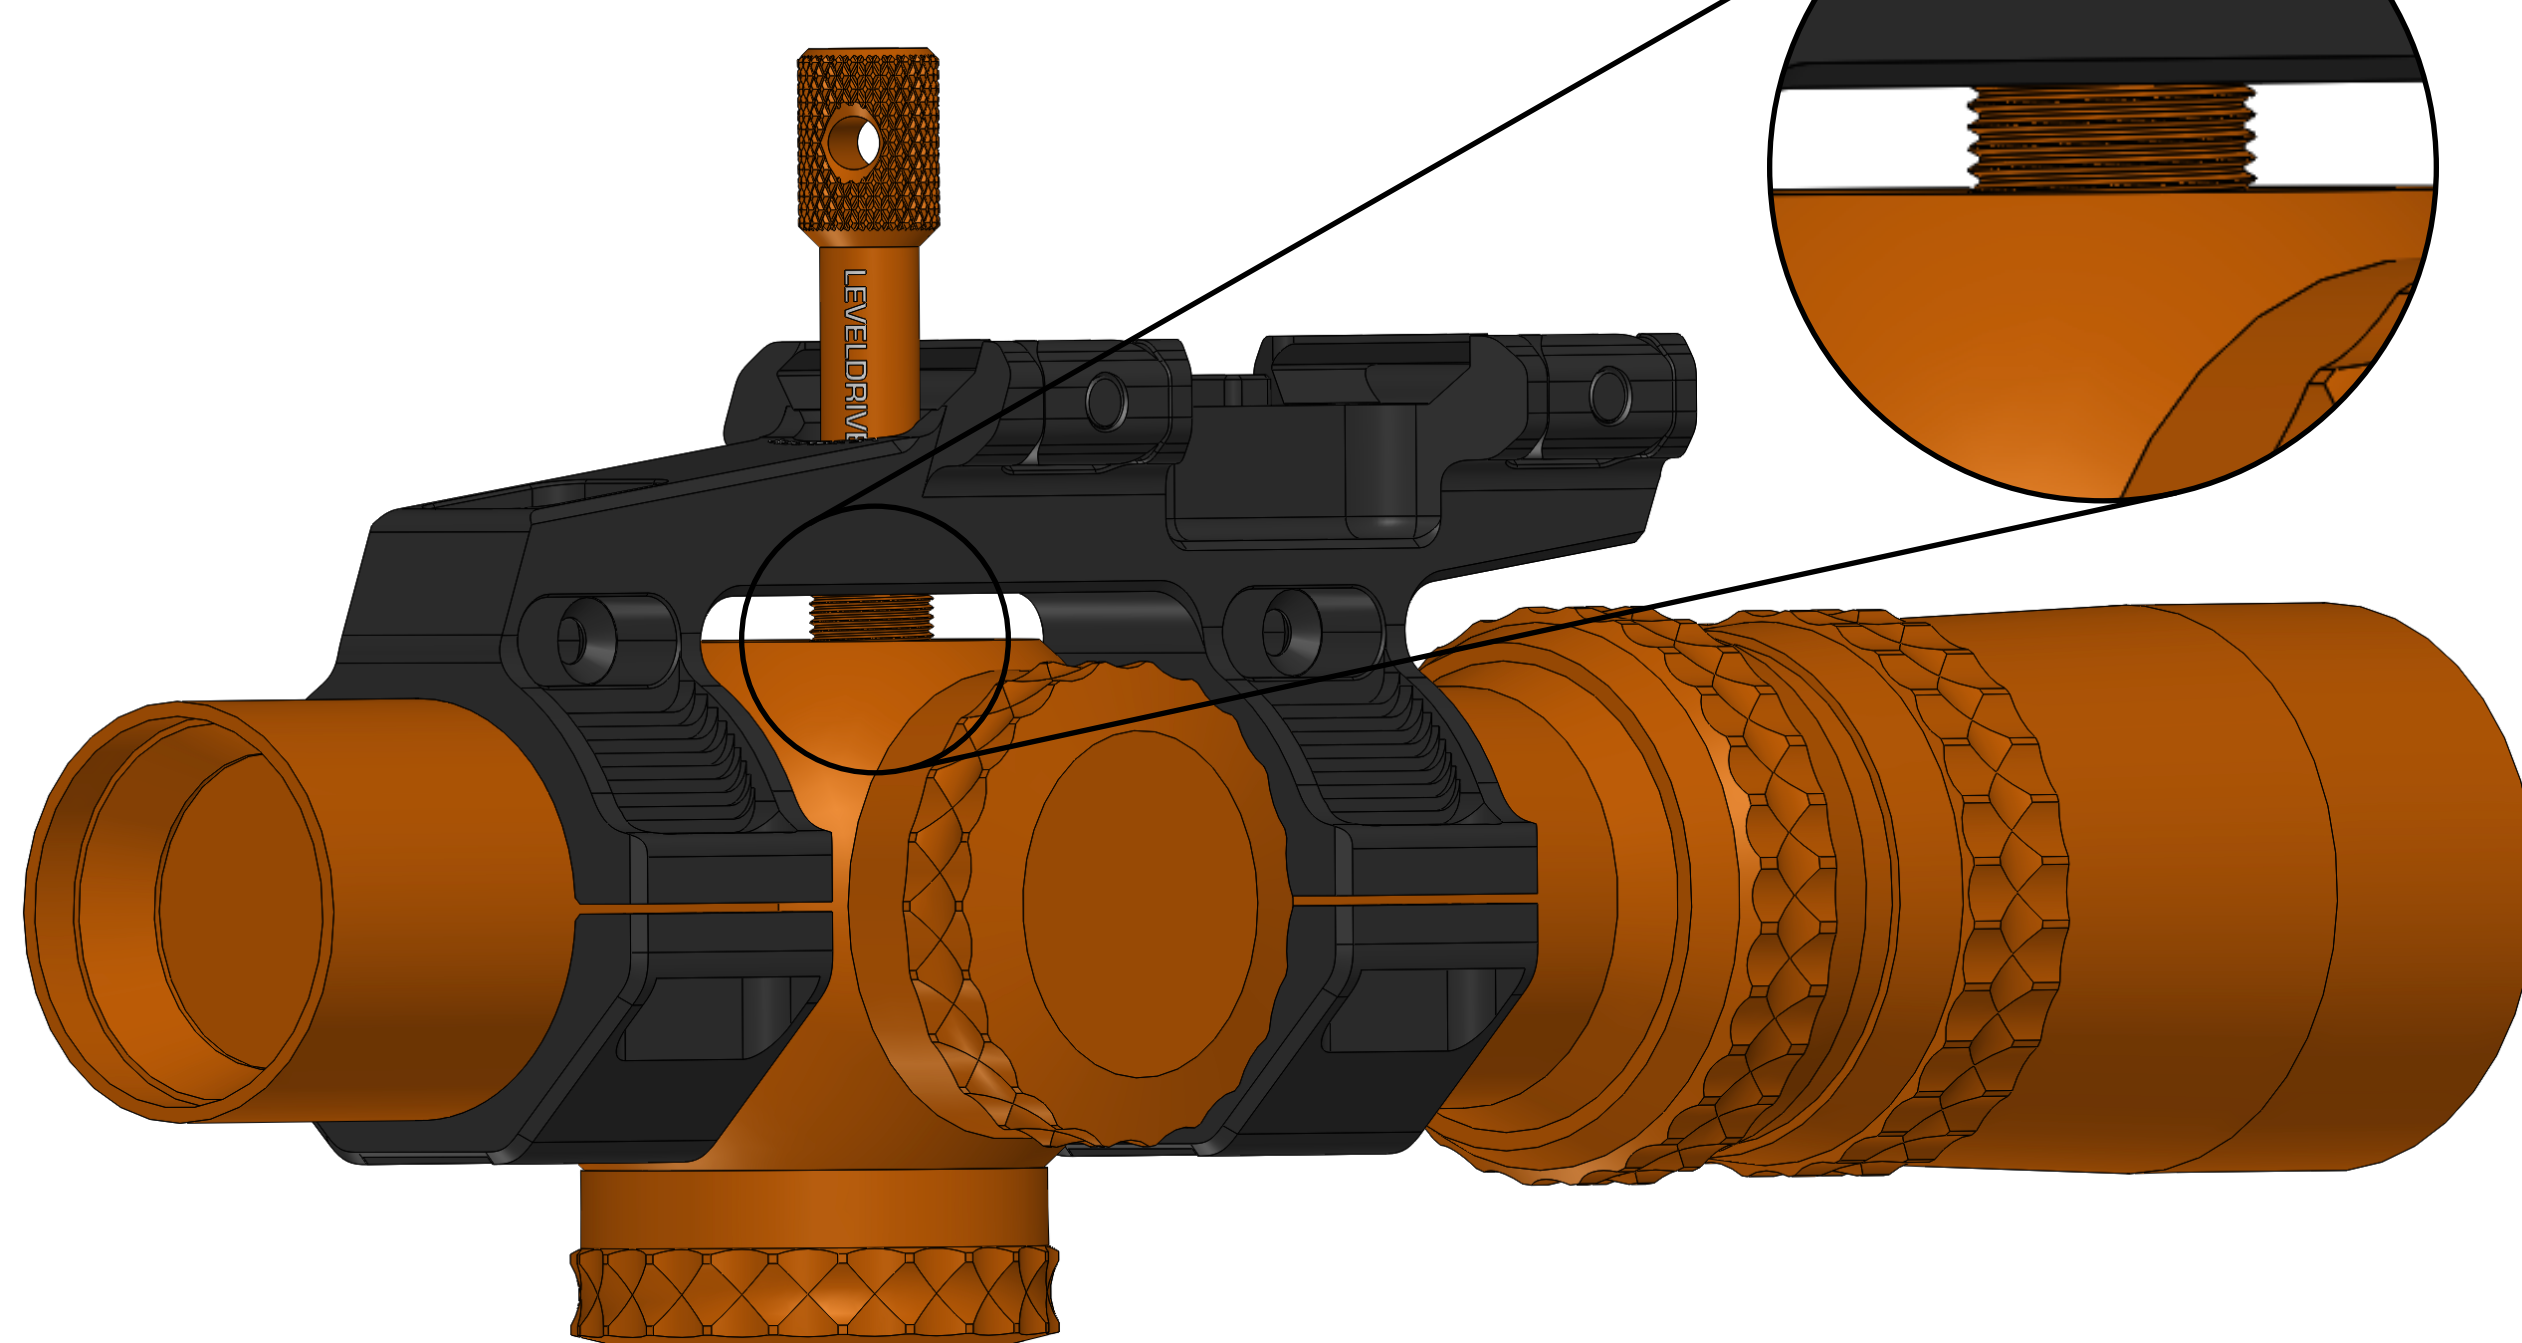


- 04.** Leave LevelDrive tool snug against the flat base of the scope and insert screws on gap side of rings.

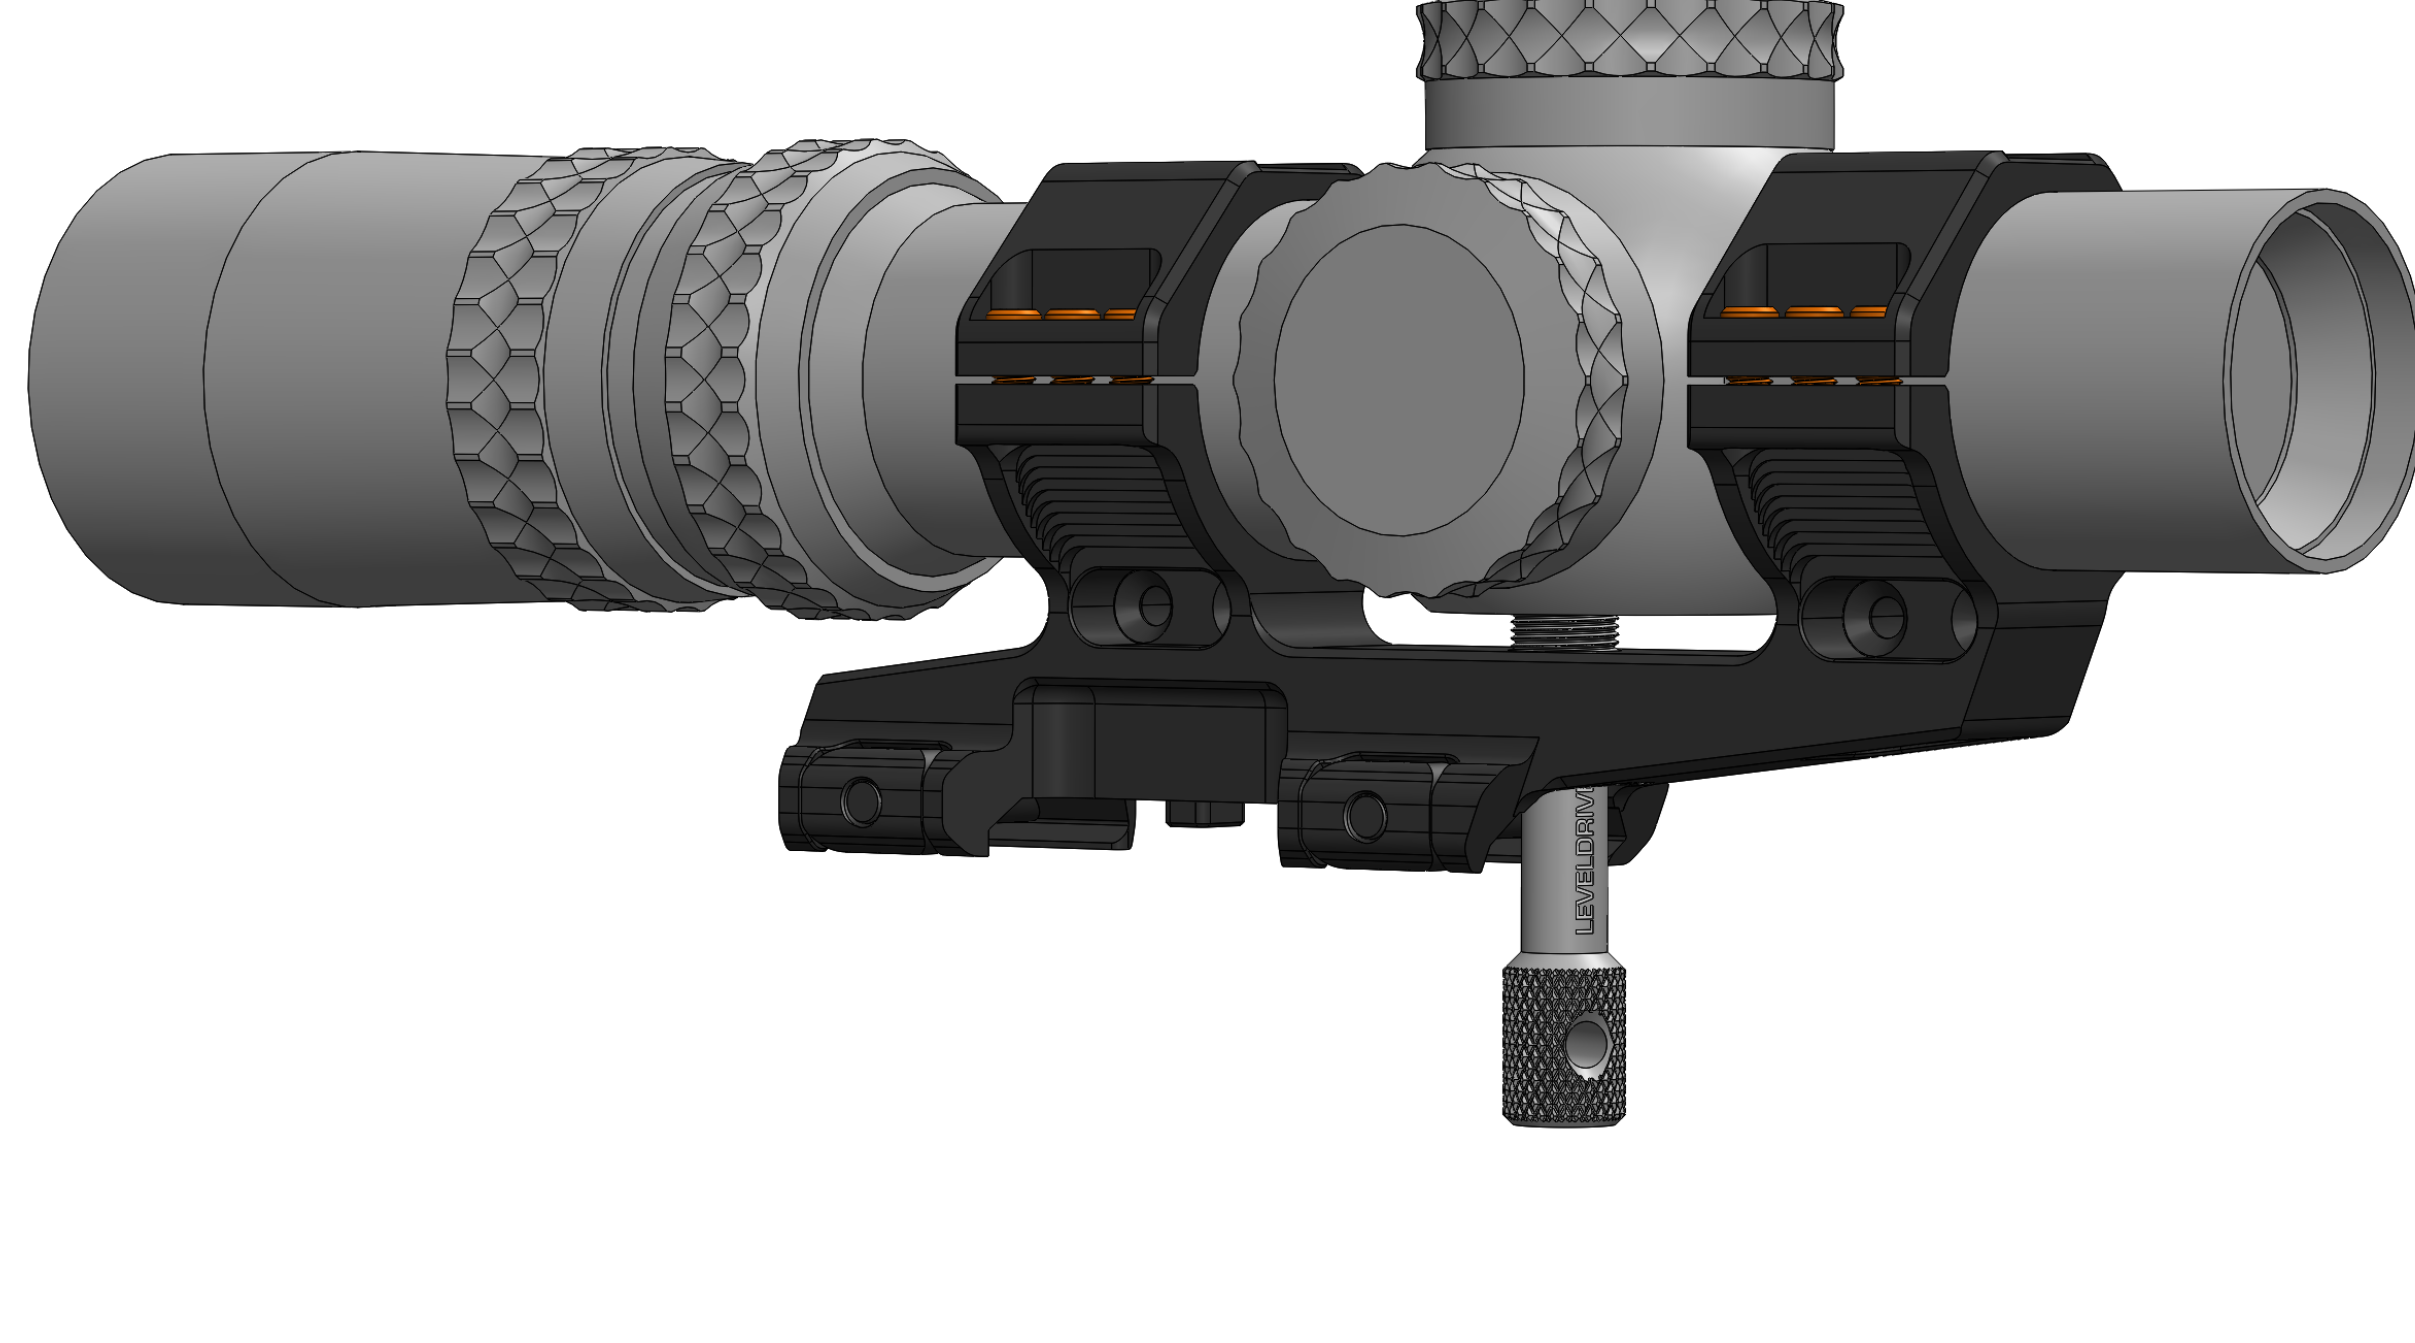

- 05.** Tighten each screw in the pattern shown, as many times as needed until torque stabilizes at 20inch-lbs.

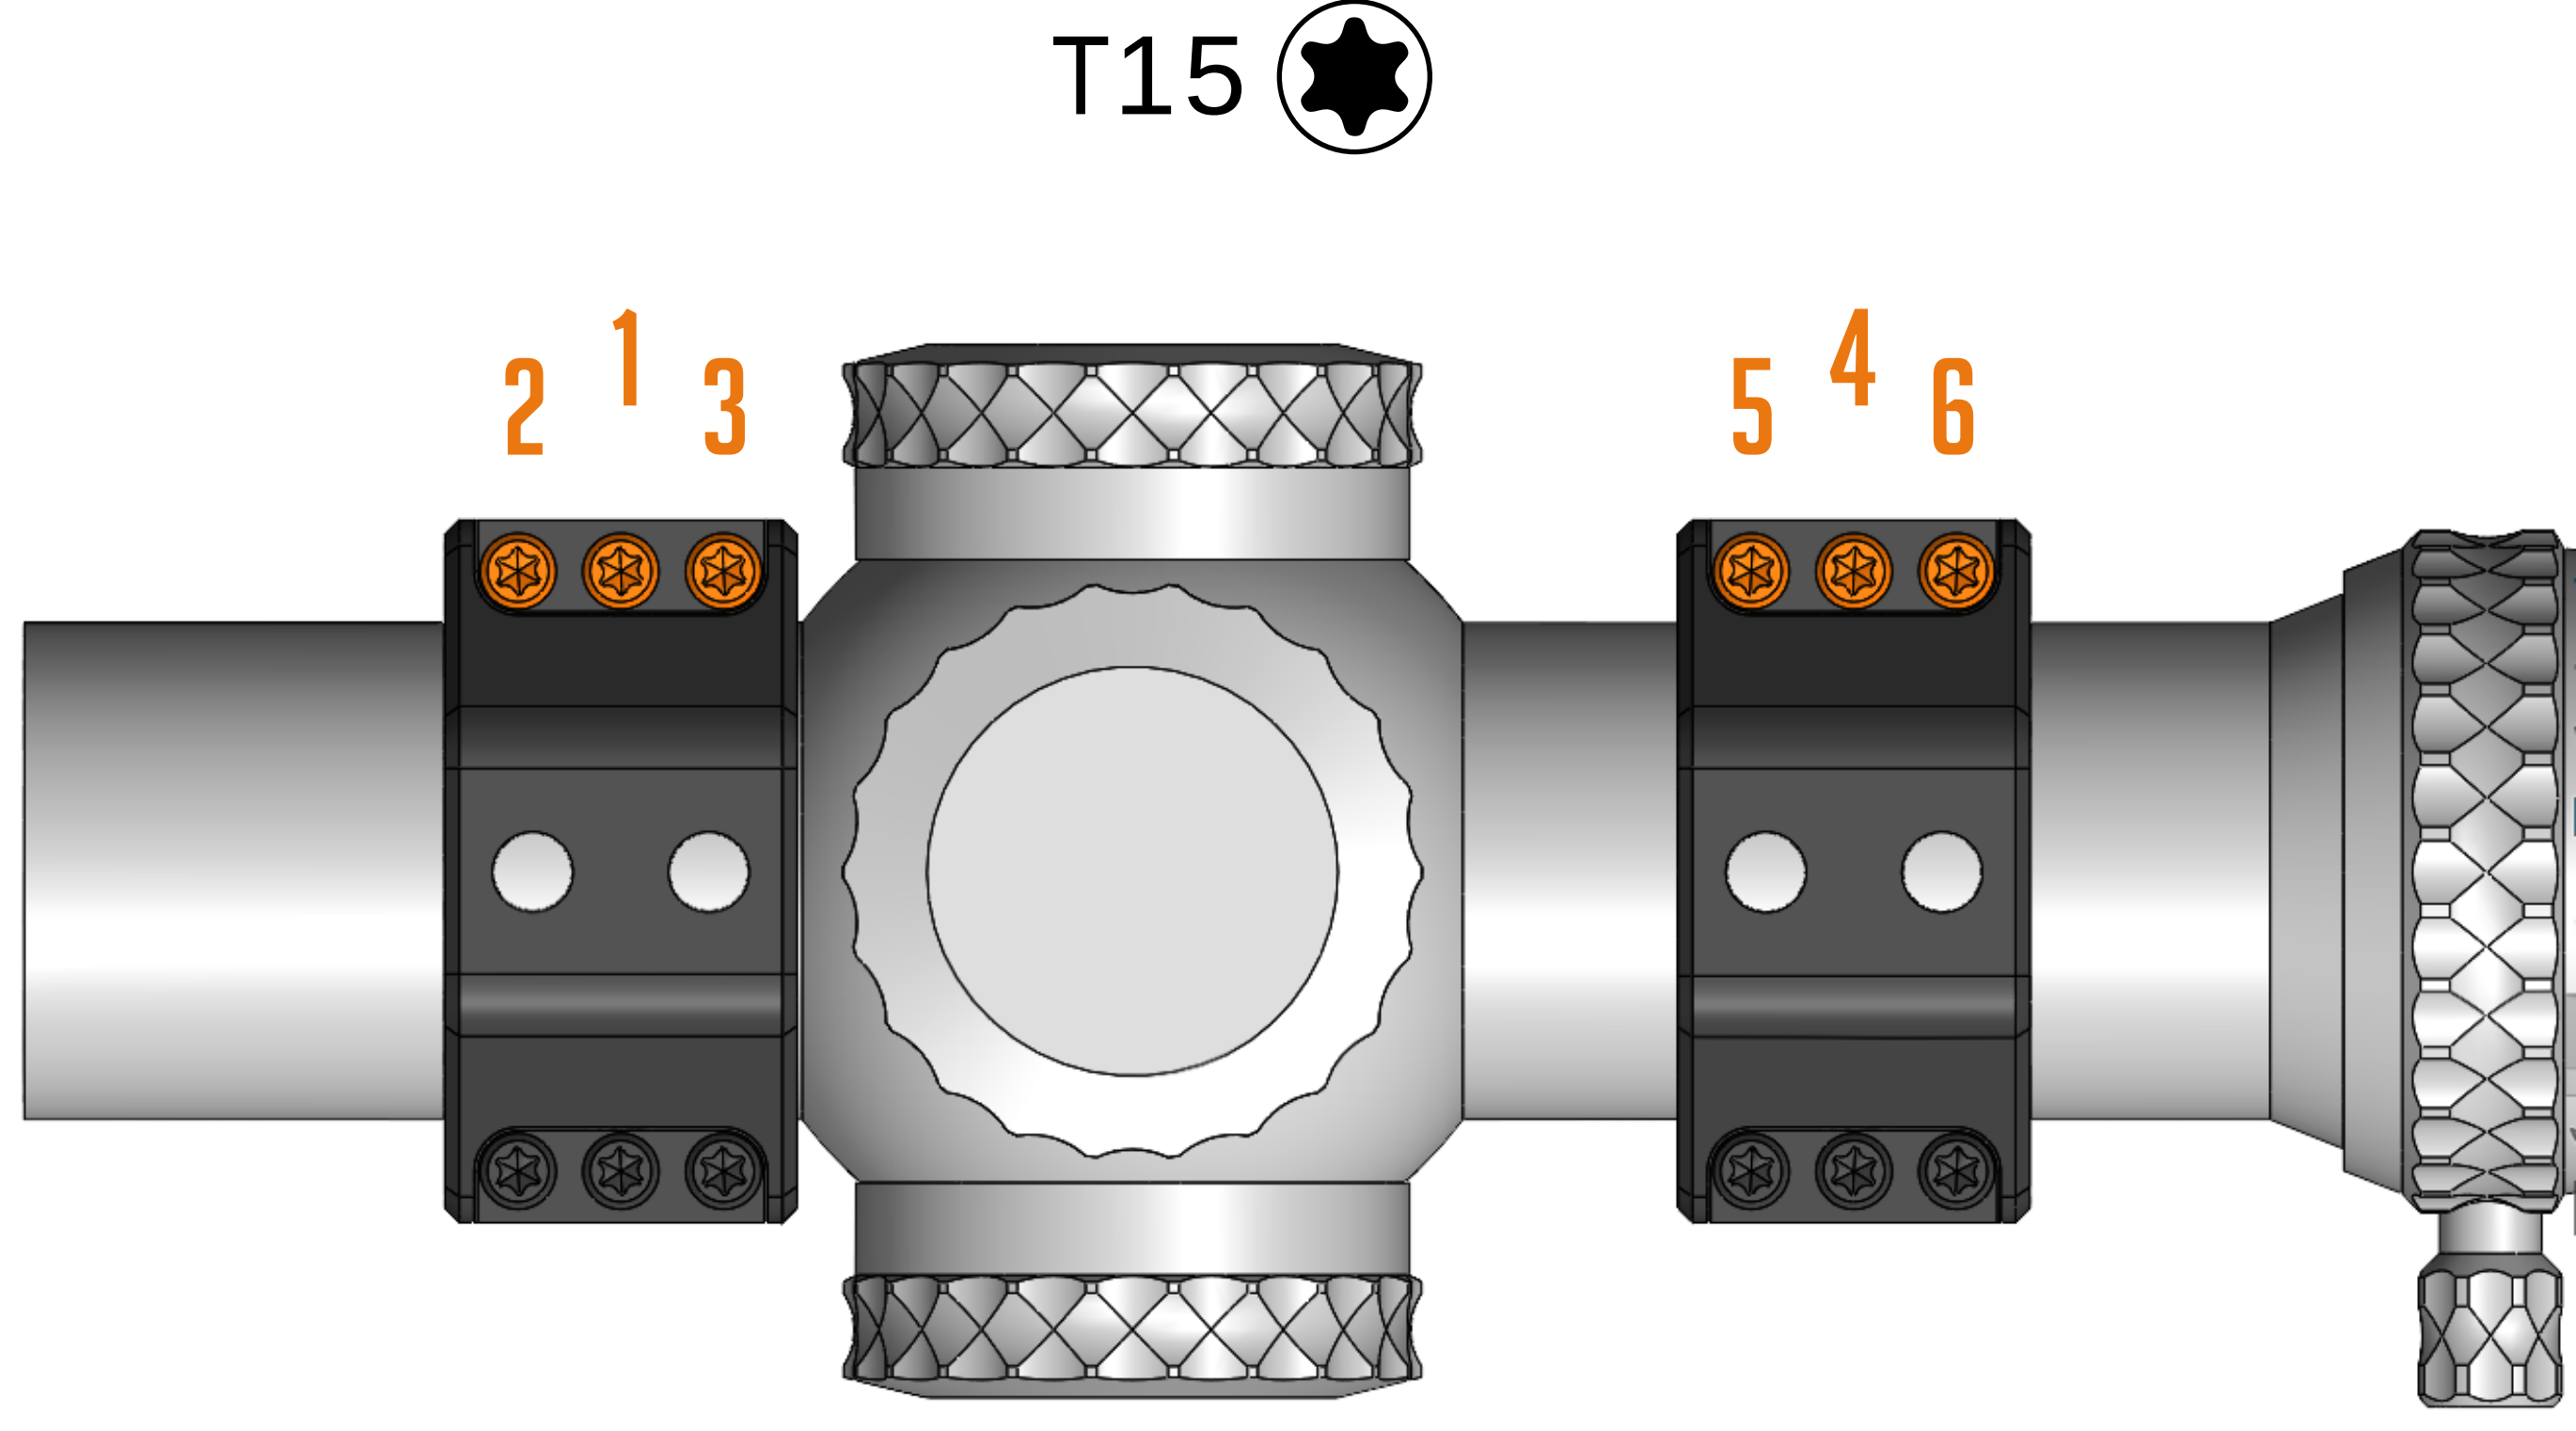


- 06.** Remove LevelDrive tool from base and loosen clamps enough to hook mount onto rail.

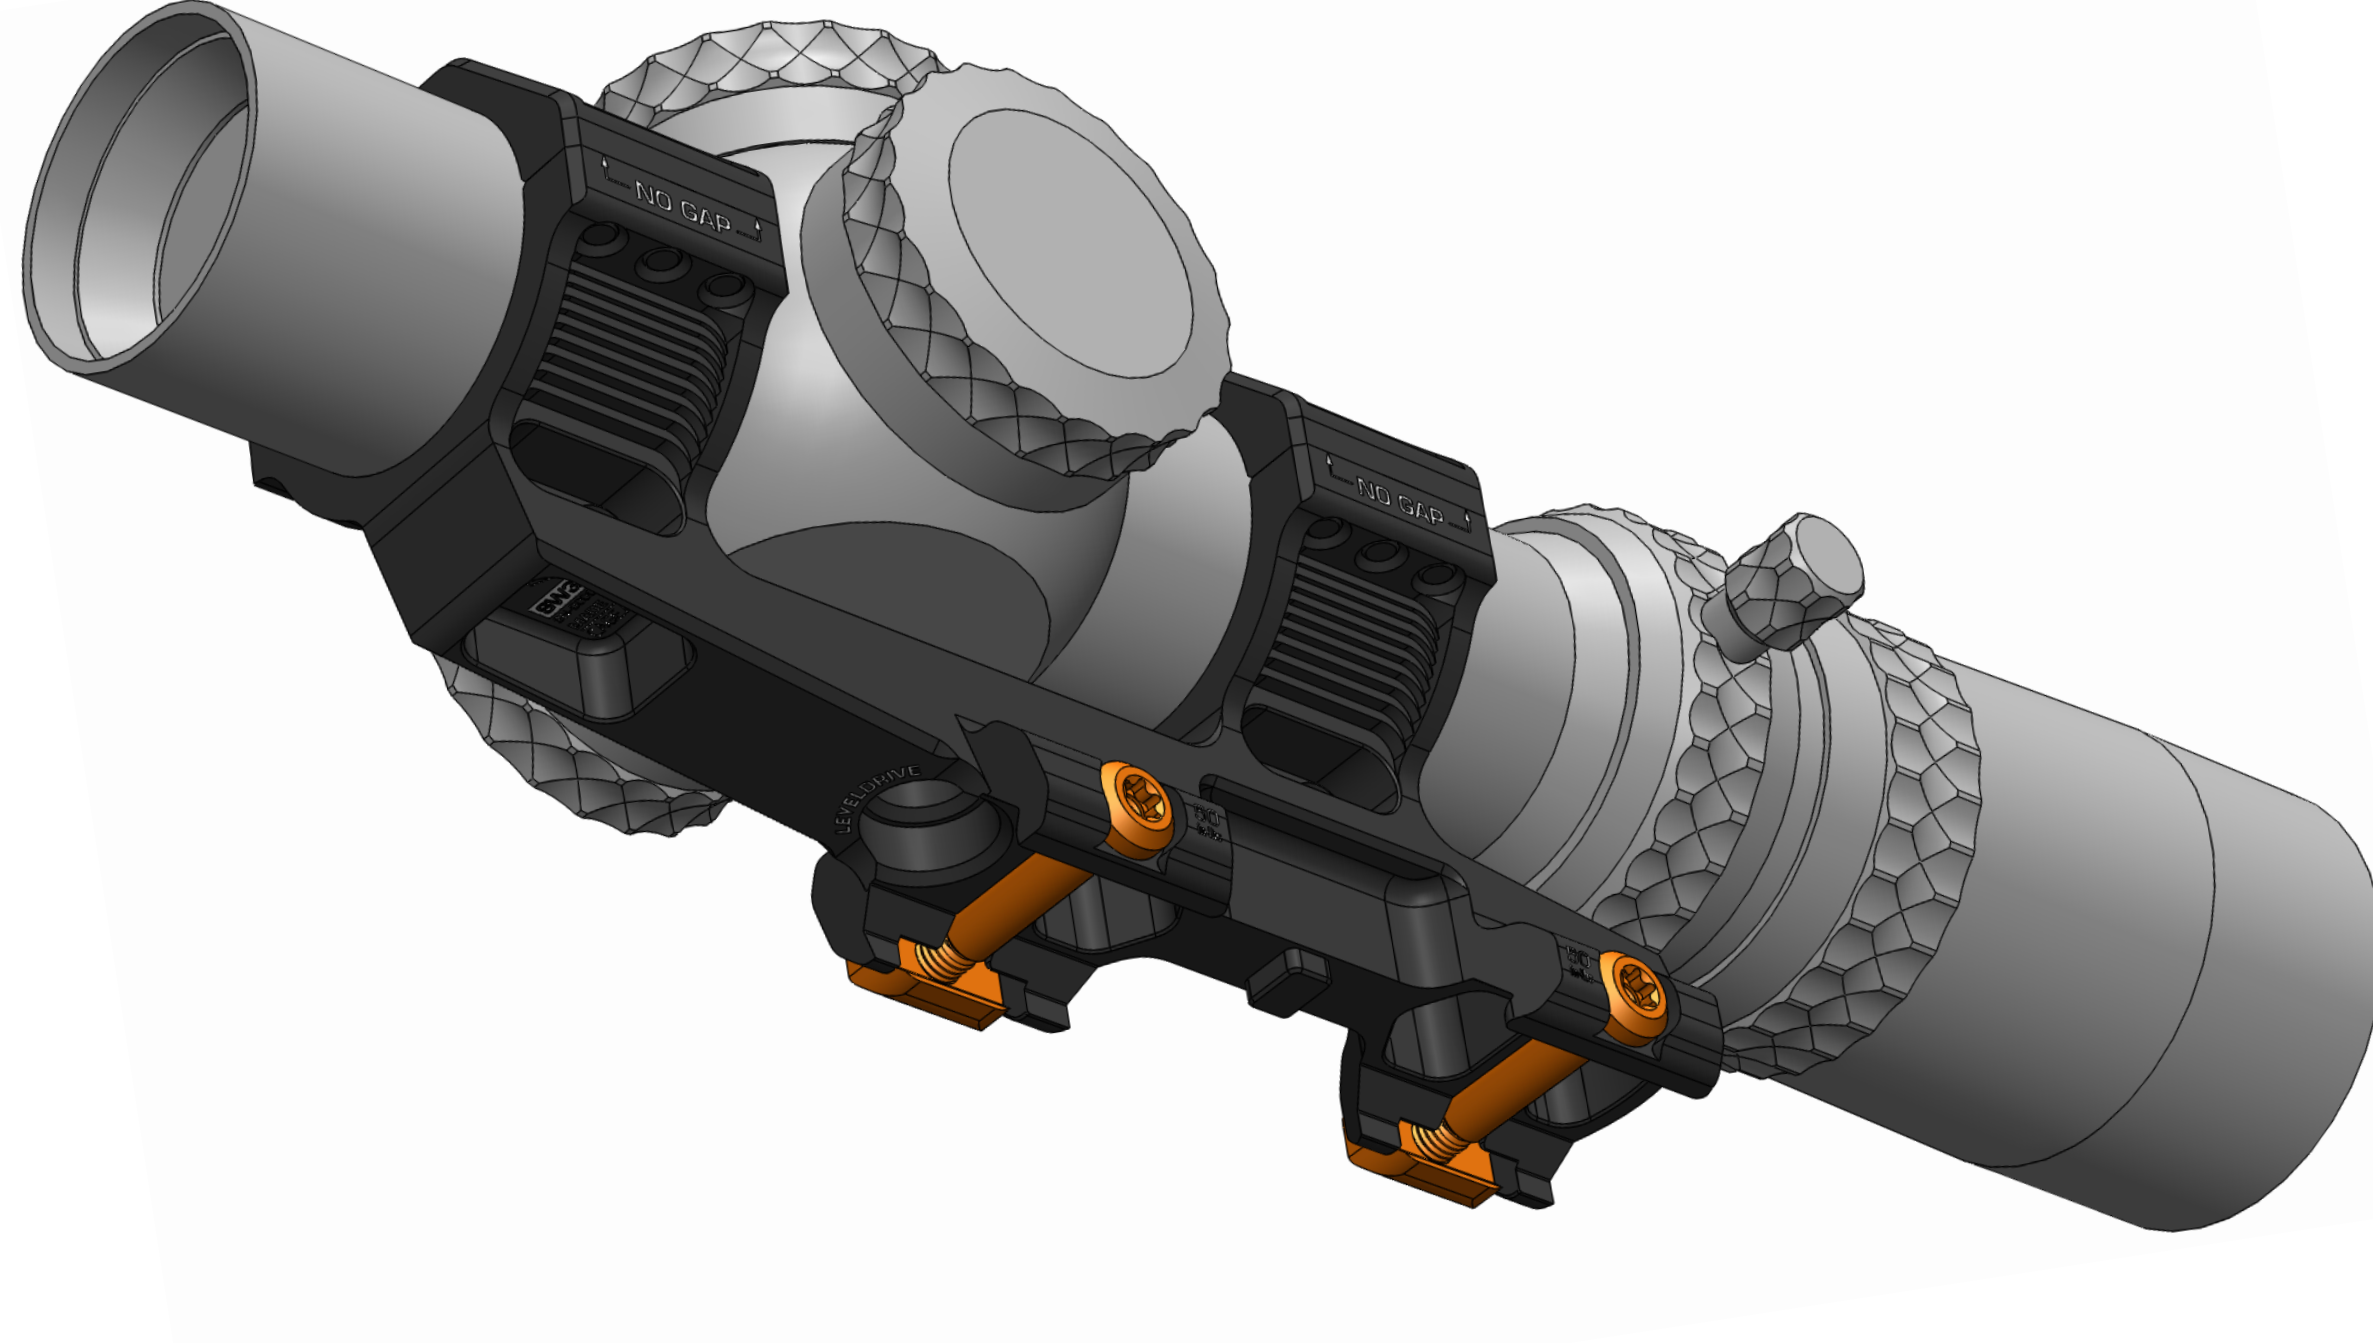

UNLOAD & MAKE WEAPON SAFE

- 07.** Hook mount onto rail and push forward to seat against rail slot. Tighten cross-bolts to 50inch-lbs.

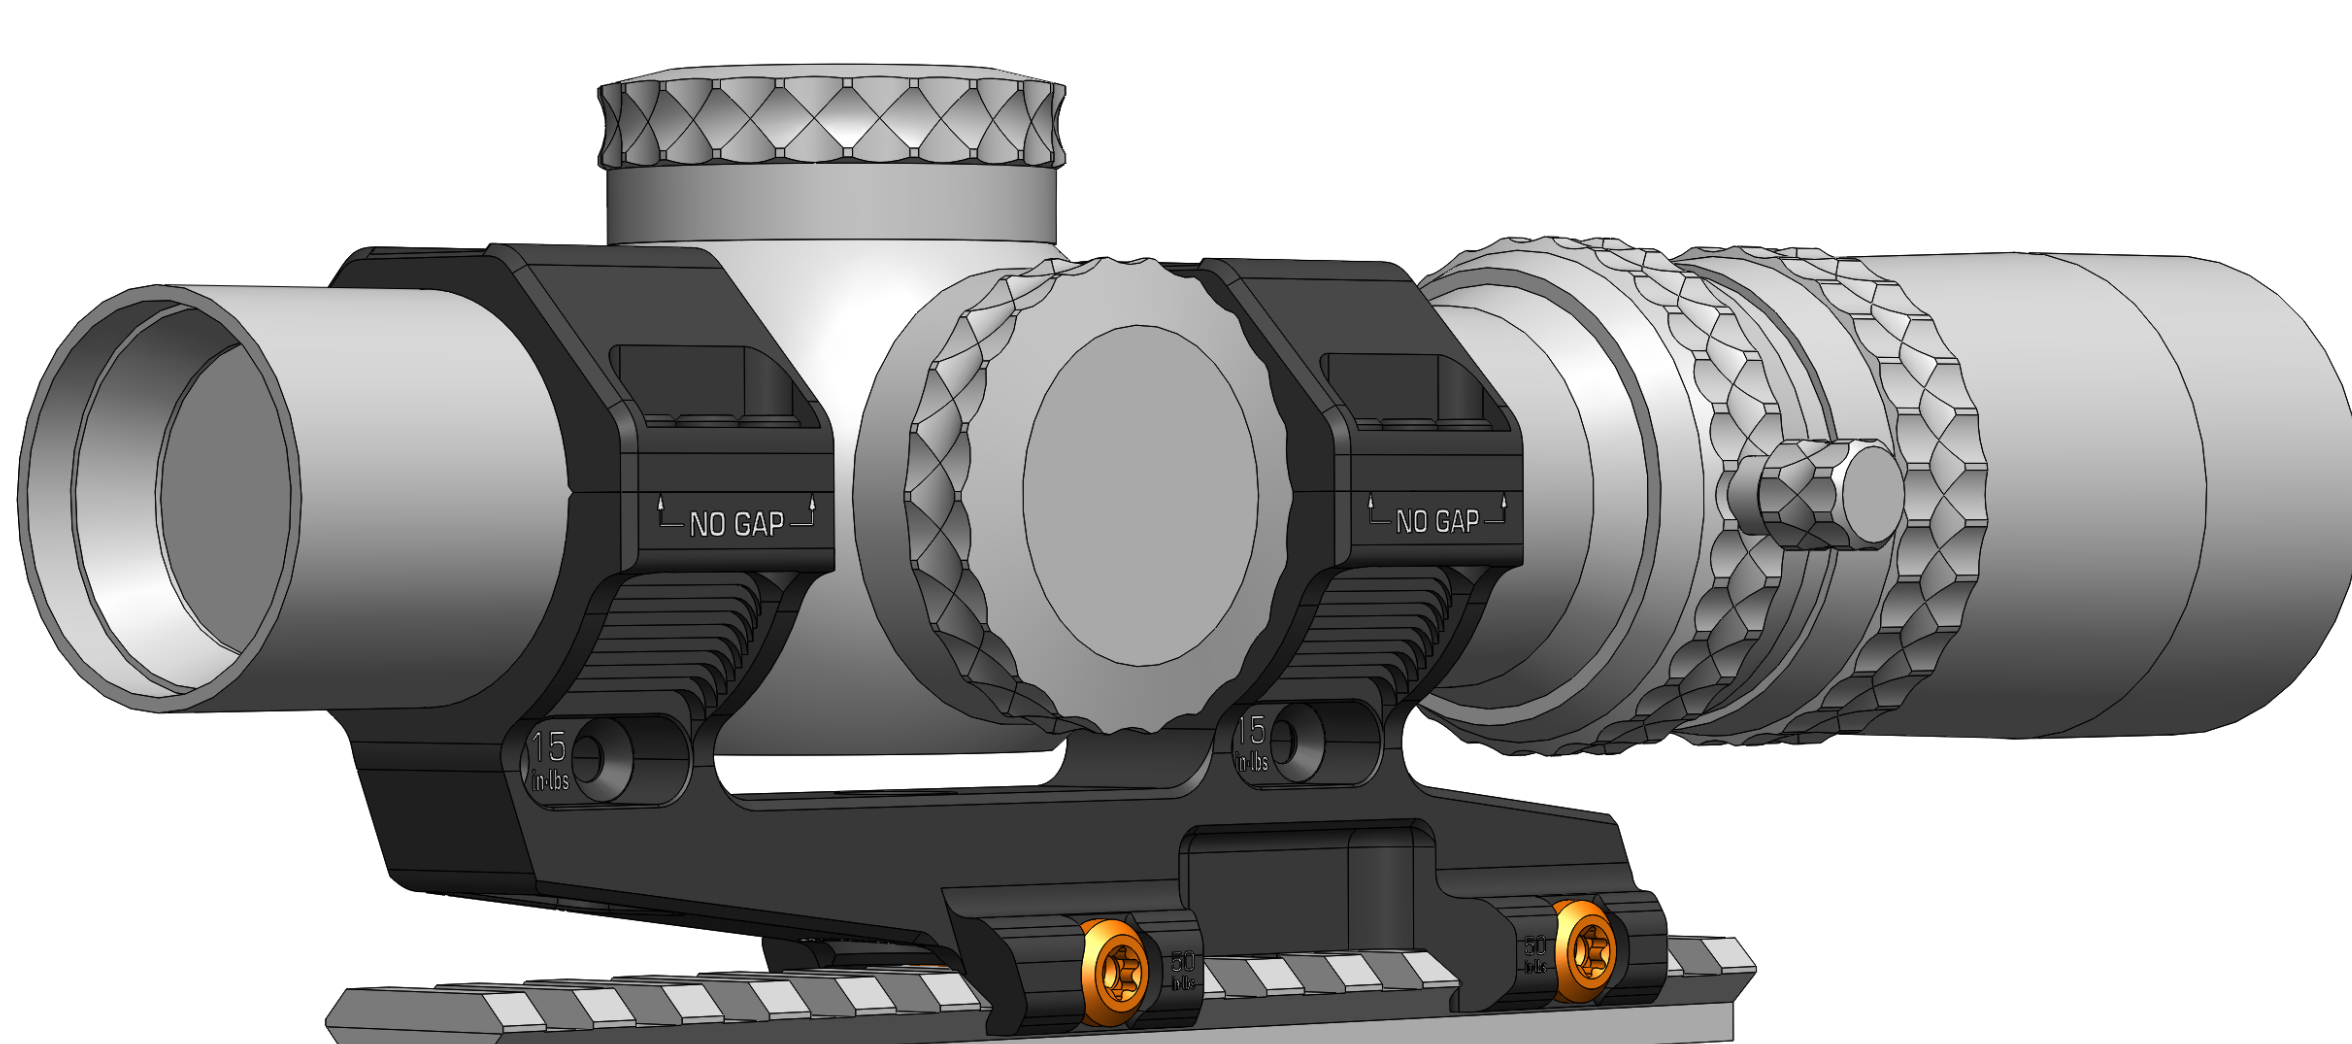

T25

Questions?

[Email Support](#)